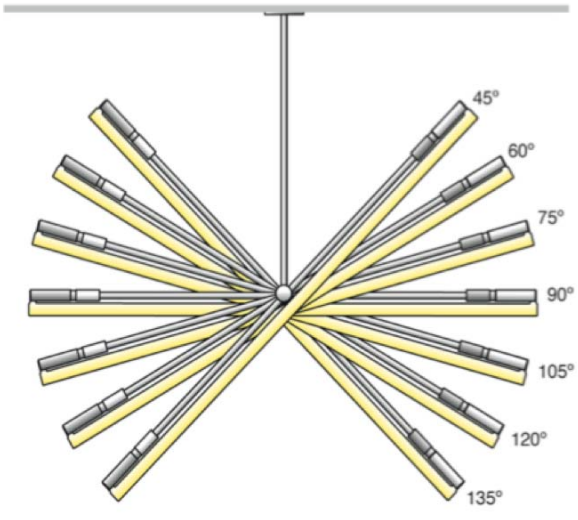


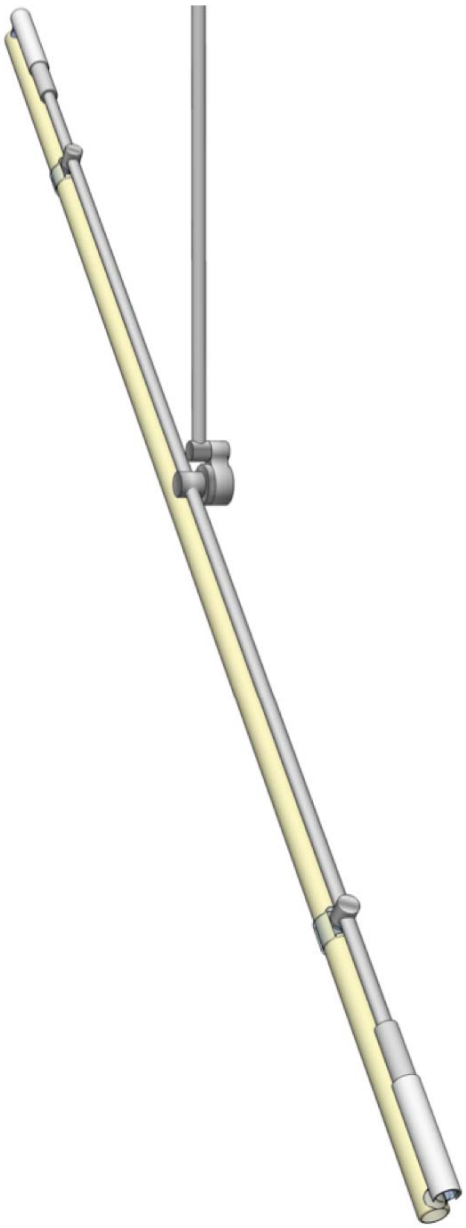

# AXXS DETAILS

- A creative way to illuminate any interior space.
- Armature mounted lamps with end-to-end illumination
- Set at multiple angles for dynamic installations.
- Reliable, proven technology with 50,000 hour lamp life.
- Dimming, silent, energy efficient power supplies.
- Available in standard lengths from 4' to 6'.
- Clear anodized finish.
- 11 hues of white and 30+ colors with high CRI.
- Up to 780 lumens per foot and 78 lumens per watts.

## Electrical + Lumen Data

### e50 Electrical Specifications

| Volts | Amps | Watts * | Lumens * | Lumens/Watts |
|---|---|---|---|---|
| 120 | .35 | 4.5 | 307 | 68 |
| 277 | .14 | 4.5 | 307 | 68 |

### e100 Electrical Specifications

| Volts | Amps | Watts * | Lumens * | Lumens/Watts |
|---|---|---|---|---|
| 120 | .46 | 6.6 | 521 | 79 |
| 277 | .20 | 6.6 | 521 | 79 |

### e200 Electrical Specifications

| Volts | Amps | Watts * | Lumens * | Lumens/Watts |
|---|---|---|---|---|
| 120 | .78 | 12.6 | 780 | 78 |
| 277 | .35 | 12.6 | 780 | 78 |

* Per Linear Foot, based on 7'6" lamp at 3500k

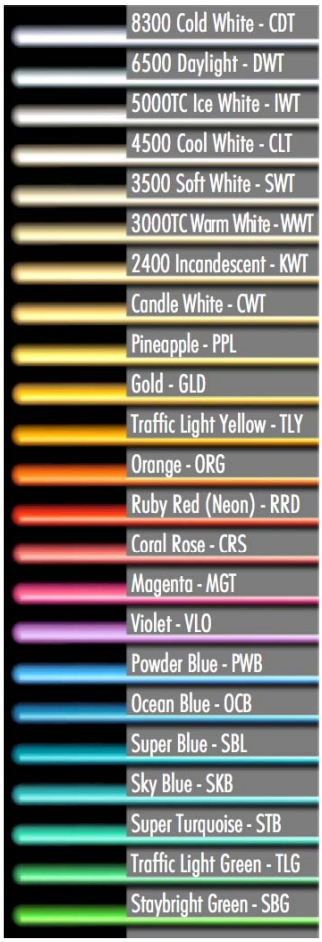


Contact ACL for additional color options.

Project Name _____ Qty _____ Date _____

**SPECIFICATION CODE:**

AXXS - - - DR - - - -

| Product | Power Supply | Stem Length | Environment | Color (1) | Primary | Dimming (2) | Lamp Dimension |
|---|---|---|---|---|---|---|---|
| AXXS<br>Cold Cathode | e50 - Energy Saver<br>e100 - Standard Output<br>e200 - High Output | 4' to 6' - (3"increment) | DR - Dry | See Color Chart | 120V<br>277V | 2 - 2 Wire<br>3 - 3 Wire | 4' to 6' |

(1) For multiple colors place a comma after each selection.
(2) Reverse phase low-voltage electronic dimmers are recommended for optimal performance.
Specifications subject to change without notice. 073112

**ACL INC.**
Architectural Cathode Lighting, Incorporated
cathodelighting.com
5301 Pacific Boulevard
Huntington Park, California 90255 USA
Telephone 323.581.8800
Fax 323.581.7971
info@cathodelighting.com

©2012 Architectural Cathode Lighting, Inc.