

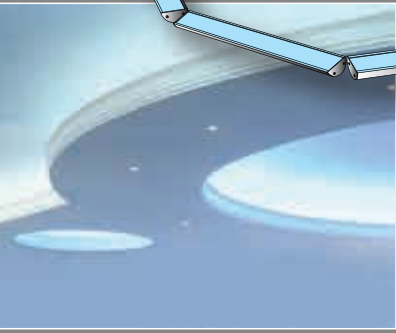


AXXNT: application concept
circular cove
configuration

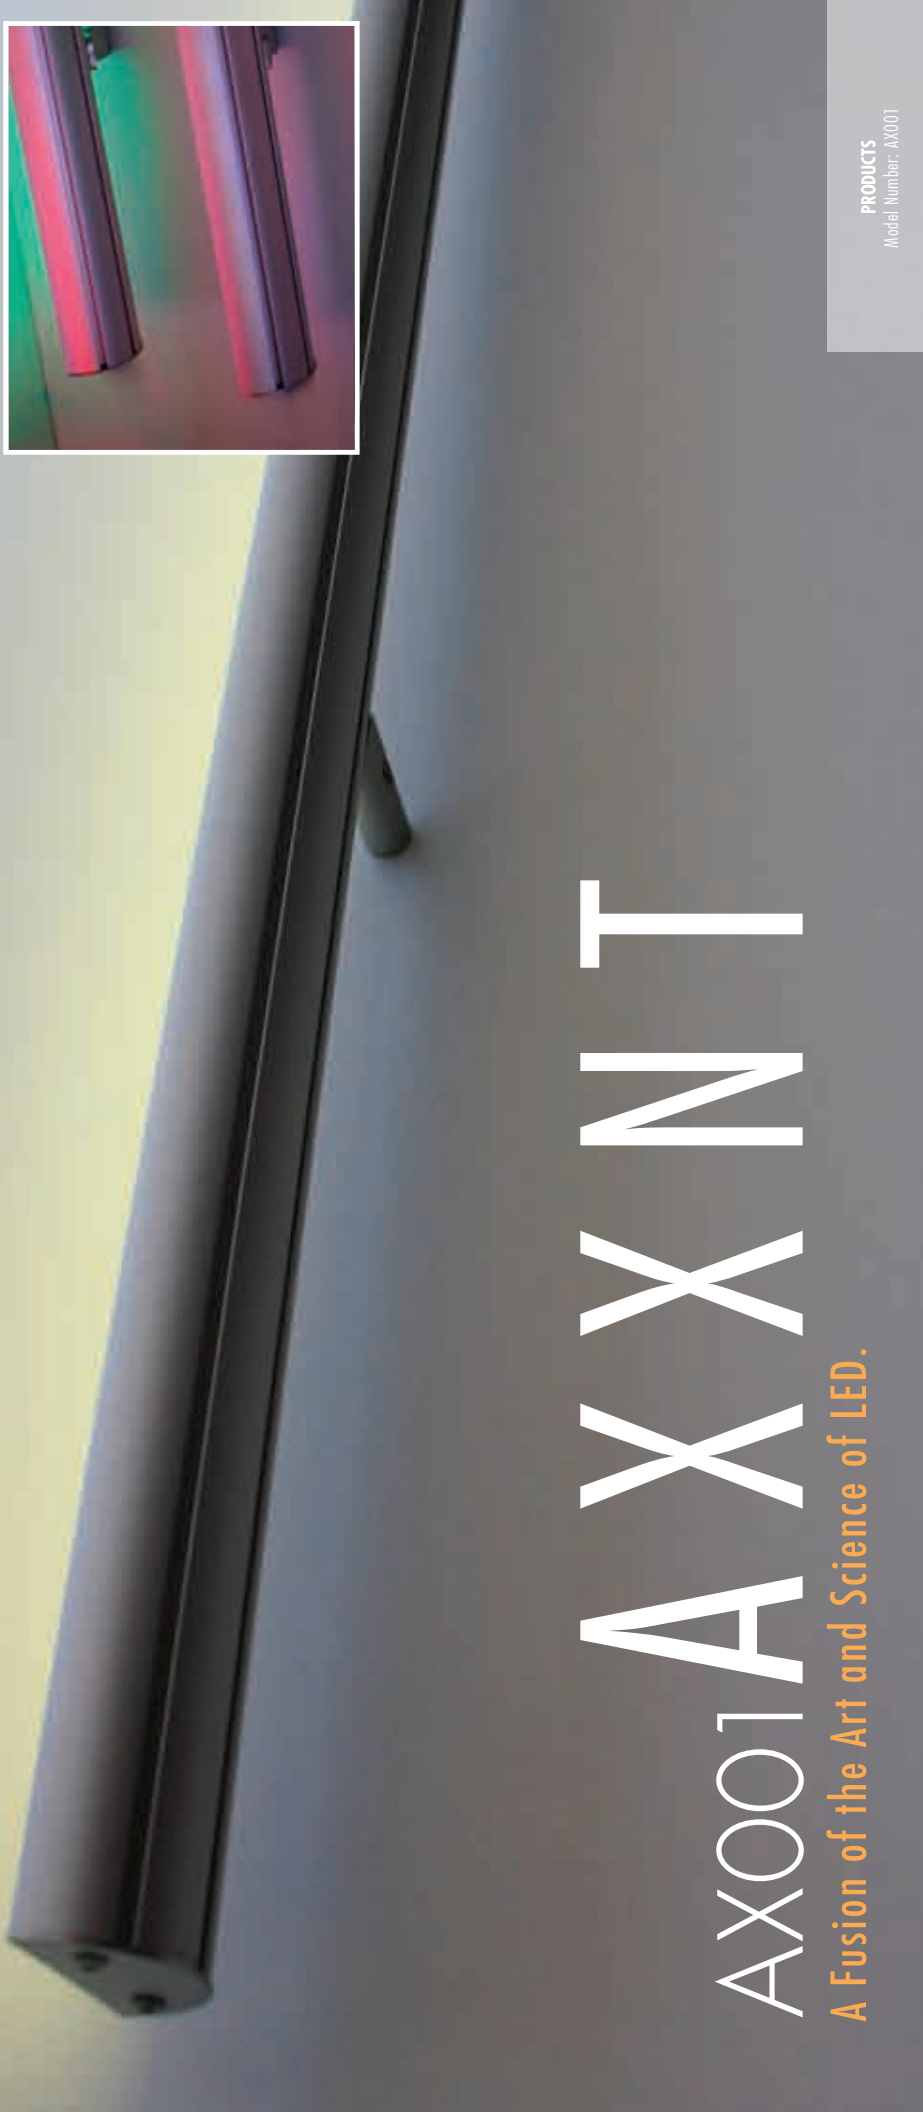








AXXNT: application concept
rectangular cove
configuration

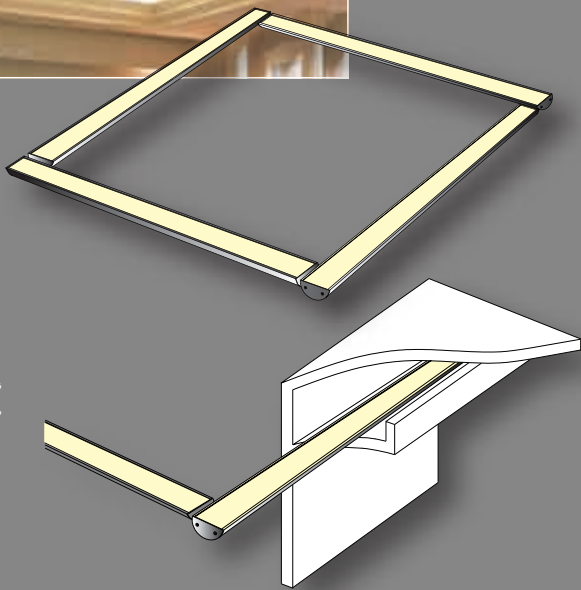

AX001 AXXNT

A Fusion of the Art and Science of LED.

AXXNT: Modular LED lighting system
designed by Eric Zimmerman
and manufactured by
ACL Inc. in the U.S.A.

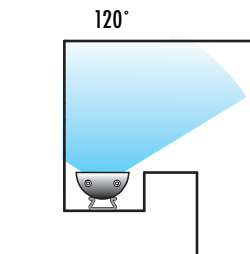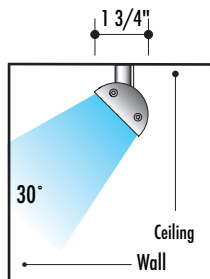

AXXNT, Mounted on wall

AXXNT, Mounted in Coves

AX001*/002*

AXXNT: MODULAR LED SYSTEM

FEATURES :

- * ideal for cove applications
- * enclosure includes simple, snap-in brackets for easy cove installations
- * enclosure projects a level of design elegance for exposed applications
- * even illumination without gaps, scalloping or socket shadow
- * available in 30 degrees or 120 degrees beam spread
- * produced with durable dust and debris resistant enclosure.
- * modular construction with minimal points of attachment for attractive and functional linear applications
- * 50,000 hours lamp life
- * 3 year limited warranty
- * low wattage consumption, approximately 2 to 3 watts per linear foot
- * construction accommodates dry, damp, and wet locations
- * available with LED drivers that can be installed remote up to approx. 50 ft and operate approx. 75 linear ft of LED modules

SPECIFICATIONS :

models: AX001 wall/ceiling mount with adjustable aluminum standoff

AX002 cove mount with steel snap-in mounting clip

construction: clear satin aluminum housing with frosted acrylic lens

lamp beam spread: 30 degrees or 120 degrees

LED drivers: class 2 rated fused overload protection for secondary feeds

primary power: 120V or 277V

secondary power: 24V

watts: range of 18 to 250 watts depending upon load and type of LED driver (contact ACL to assist in specifying the correct electrical rating of LED driver)

system compliance: UL listed for dry, damp or wet location

dimensions: AX001 Wall/Ceiling Surface Mount 3" wide x 1.00" high

AX002 Cove Mount 1.25" high x 2" wide

both models available in 2, 4, 6 and 8 ft as well as custom lengths

colors: 2800°K warm white, 3700°K warm white, 6500°K cool white, red, amber, orange, blue, aqua, green and mixed colors

