


- A. Lamp
- B. Connector Opening
- C. Ballast Enclosure
- D. Access Door
- E. Flexible Conduit

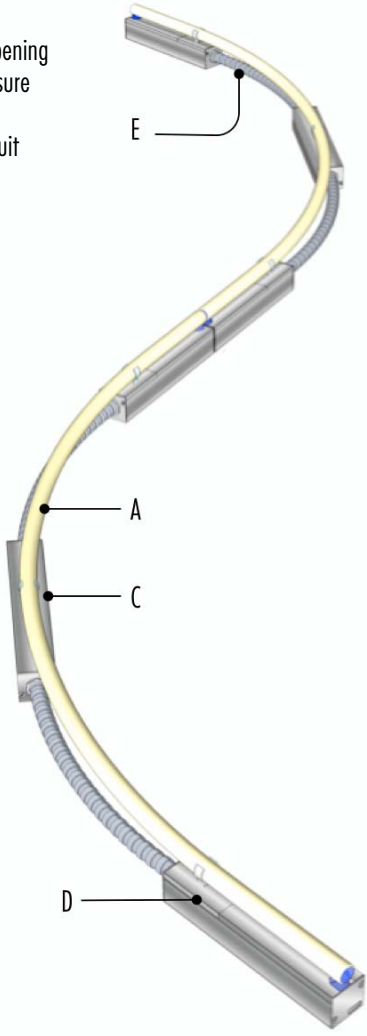

DETAILS

cCRVSm mini

- Custom curved luminaires to fit any interior space.
- Seamless end-to-end illumination with zero socket shadow.
- Reliable proven technology with up to 50,000 hour lamp life.
- Integrated Class A energy efficient power supplies.
- 11 hues of white and 30+ colors with high CRI.
- Up to 521 lumens per foot and 79 lumens per watt.
- Compact 1 5/8" x 2 5/8" profile fits into tight spaces.
- Pre-wired and assembled for quick installation.
- Easy access to lamps and ballasts.
- Daisy-chain using quick connect system.
- Dimmable

Electrical + Lumen Data

e50 Electrical Specifications

Volts	Amps	Watts *	Lumens *	Lumens/Watts
120	.35	4.5	307	68
277	.14	4.5	307	68

e100 Electrical Specifications

Volts	Amps	Watts *	Lumens *	Lumens/Watts
120	.46	6.6	521	79
277	.20	6.6	521	79

* Per Linear Foot, based on 7'6" lamp at 3500k



Contact ACL for additional color options.

Project Name _____ Linear Feet _____ Date _____

SPECIFICATION CODE:

Product	Model	Environment	Color(s)	Primary	Dimming	Mount
cCRVSm mini Cold Cathode	e50 (1) e100 (1)	DR - Dry	See Color Chart (2)	120V 277V	2 - 2 Wire (3) 3 - 3 Wire(3)	S - Surface

(1) e50 - Energy Saver, e100 - Standard Output.
 (2) For multiple colors place a comma after each selection. (3) Reverse phase low-voltage electronic dimmers are recommended for optimal performance.
 Specifications subject to change without notice.