


- A. Lamp
- B. Connector Opening
- C. Ballast Enclosure
- D. Access Door

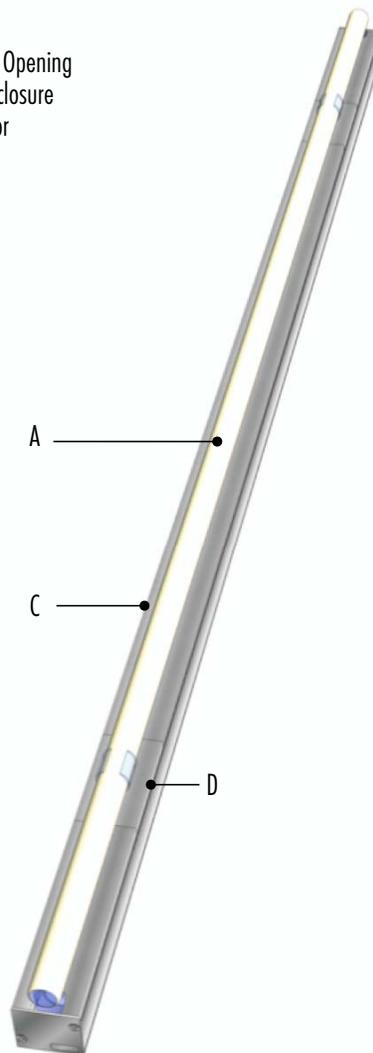

- Standard and custom straight luminaires to fit any interior space.
- Seamless end-to-end illumination with zero socket shadow.
- Reliable proven technology with up to 50,000 hour lamp life.
- Integrated Class A energy efficient power supplies.
- 11 hues of white and 30+ colors with high CRI.
- Up to 521 lumens per foot and 79 lumens per watt.
- Compact 1 5/8" x 2 5/8" profile fits into tight spaces.
- Pre-wired and assembled for quick installation.
- Easy access to lamps and ballasts.
- Daisy-chain using quick connect system.
- Dimmable

Electrical + Lumen Data

e50 Electrical Specifications

Volts	Amps	Watts *	Lumens *	Lumens/Watts
120	.35	4.5	307	68
277	.14	4.5	307	68

e100 Electrical Specifications

Volts	Amps	Watts *	Lumens *	Lumens/Watts
120	.46	6.6	521	79
277	.20	6.6	521	79

* Per Linear Foot, based on 7'6" lamp at 3500k

DETAILS

cSTRPmini



Contact ACL for additional color options.

Project Name _____

Linear Feet _____

Date _____

SPECIFICATION CODE:

Product	Model	Environment	Color(s)	Primary	Dimming	Mount
cSTRPmini Cold Cathode	e50 (1) e100 (1)	DR - Dry	See Color Chart (2)	120V 277V	2 - 2 Wire (3) 3 - 3 Wire (3)	S - Surface

(1) e50 - Energy Saver, e100 - Standard Output.

(2) For multiple colors place a comma after each selection. (3) Reverse phase low-voltage electronic dimmers are recommended for optimal performance.

Specifications subject to change without notice.

ACL INC.
Architectural Cathode Lighting, Incorporated

cathodelighting.com

5301 Pacific Boulevard

Huntington Park California 90255 USA

Telephone 323.581.8800

Fax 323.581.7971

info@cathodelighting.com