


A Fusion of the Art and Science of Light

SPECIFICATIONS :

model: Cathode B100 - Single Lamp Standard Output
primary power: 120V, 277V special order
compliance: UL Listed
control: color changing / dimming compatible
mounting: surface and/or recess
environment: damp or dry
lamp color(s): see color chart on Detail sheets
date: October 12, 2009

FEATURES :

Cathode B100 is ACL's cold cathode compact ballast system that can be placed in covers with conduit feed for an easy and economical installation. Cathode B100 has a significant extended lamp life and have no socket shadows and require no lamp overlap. Cold Cathode comes in a variety of colors, with economical dimming available with many commercial dimming systems. Cathode B100 is a single lamp ballast system making it simple to track parts and install due to only 2 styles of lampholders required. They are perfect for both commercial and residential applications.

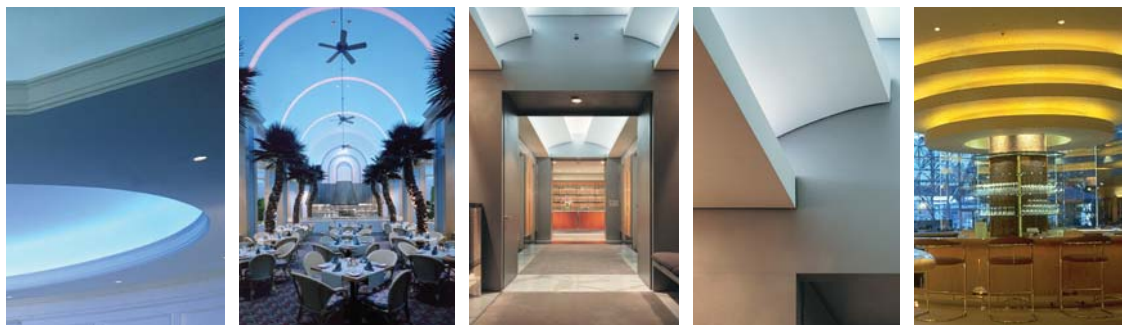

© 2009 Architectural Cathode Lighting, Inc.

**CATHODE B100
CUT SHEET**

Project Name _____ **Date** _____ **Linear Feet** _____
SPECIFICATION CODE : Note: For a variation (custom) of this product contact ACL to request a variation number and information.

B100 (1) -		S01 -		-		-	
Product	Standard	Environment	Color (s)	Primary	Dim-able	Mount	
Standard Output Single Ballast Cold Cathode	S01	DR - Dry DP - Damp	See Chart on Details Sheets (2)	120V 277V -Special Order	DI - Dim ND - Non Dim	S - Surface R - Recess	

(1) For a 7 lamp transformer system refer to our T100 system. For a 2 lamp high output ballast system refer to our B200 system.
 (2) For multiple selections place a comma after each selection.

ACL INC.
 Architectural Cathode Lighting, Incorporated
cathodelighting.com

5301 Pacific Boulevard
 Huntington Park California 90255 USA
 Telephone 323.581.8800
 Fax 323.581.7971
 info@cathodelighting.com